

## Dimmable LED Drivers

- **350mA or 700mA**  
**12V or 24V output**
- **Smooth (Triac) dimmable**
- **Thermally protected**
- **13.5 - 19W Output**




## Light Symphony Solution

These drivers are compatible with all of Light Symphony's lighting controllers, providing smooth on/off and dimmable control over constant voltage (parallel wired) or current (series wired) LEDs.

Select from 350mA, 700mA, 12V or 24V models, to suite the LED's requirements. Drivers are simply powered from the dimming or switched 'mains' output of the lighting controller.

For information on using these drivers with our Keyfob, iPhone app and timers etc. please see our wireless lighting controller products e.g. 4-Channel, LS30540LLC.

Supplied with mounting brackets, as show;

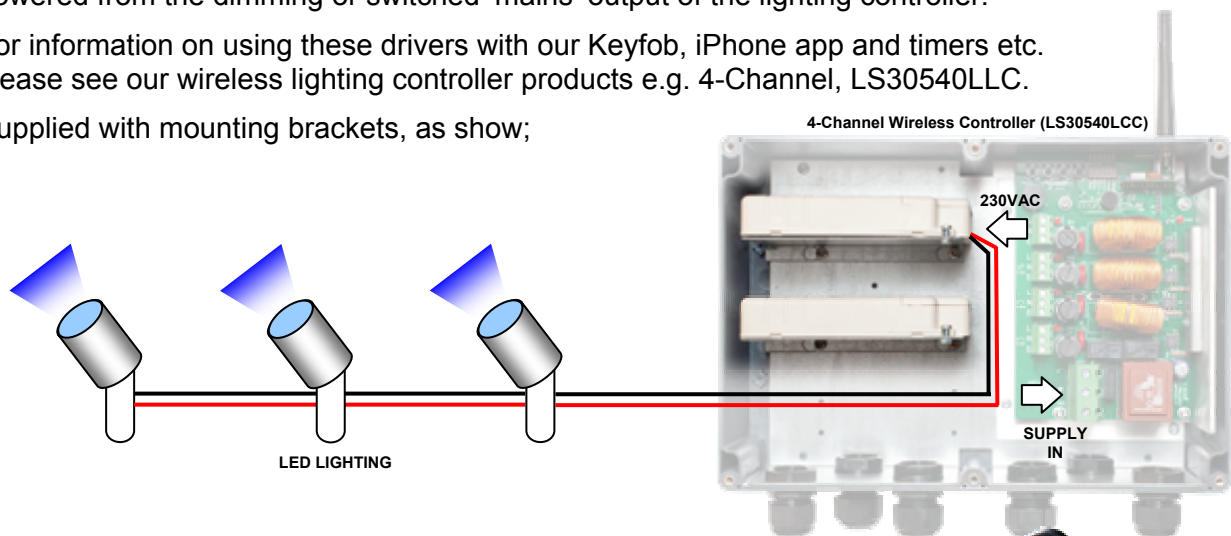

Model	Output	Input	Max	Min	Power
LS301219VLED	12V	230VAC	1600mA	3W (3 LEDs)	19.2W
LS302419VLED	24V	230VAC	800mA	3W (3 LEDs)	19.2W
LS303513CLED	350mA	230VAC	48V (12 LED)	3W (3 LEDs)	13.5W
LS307018CLED	700mA	230VAC	24V (7 LEDs)	3W (3 LEDs)	18W