

Dimmable LED Drivers – Constant Current

- 350mA - 700mA output
- Smooth (Triac) dimmable
- Thermally protected
- 14W - 20W Output




Light Symphony Solution

These drivers are compatible with all of Light Symphony's lighting controllers, providing smooth on/off and dimmable control over constant current (series wired) LEDs.

Select from 350mA, 500mA, or 700mA, to suite the LED's requirements. Drivers are simply powered from the dimming or switched 'mains' output of the lighting controller.

For information on using these drivers with our Key Fob, Smart Phone app and timers etc. please see our wireless lighting controller products e.g. 4-Channel, LS30540LLC.

Can be mounted as shown;

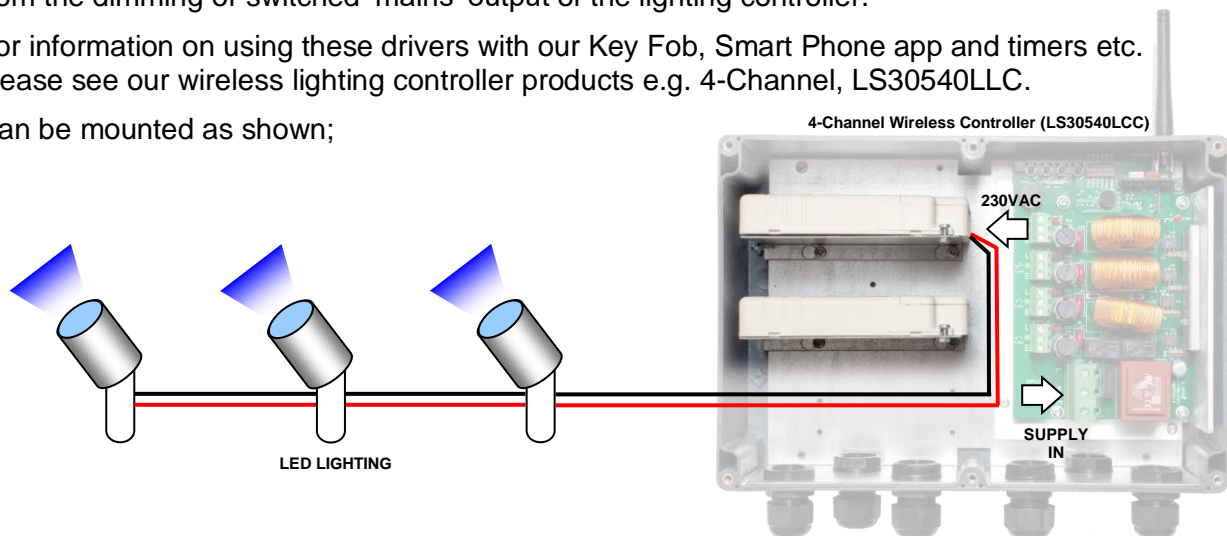

Iout	Uout	Watts	DIP Switch Setting	
			1	2
350mA	3-42V	14.5W	-	-
500mA	3-40V	20W	ON	-
700mA	3-28V	20W	ON	ON